


TTU-2840XT™

LTE CAT-1



Extended Durability Asset Tracker Built for Extreme Weather Climates and Excellent Field Reliability

The TTU-2840XT™ LTE CAT-1 is a complete asset and trailer tracking device with a rechargeable battery and an extended temperature charging range, providing an ideal solution for assets that are tethered or may sit disconnected for periods of time. PEG's powerful engine, precise GPS technology and LTE CAT-1 delivers intelligence to enable today and tomorrow's asset management solutions.

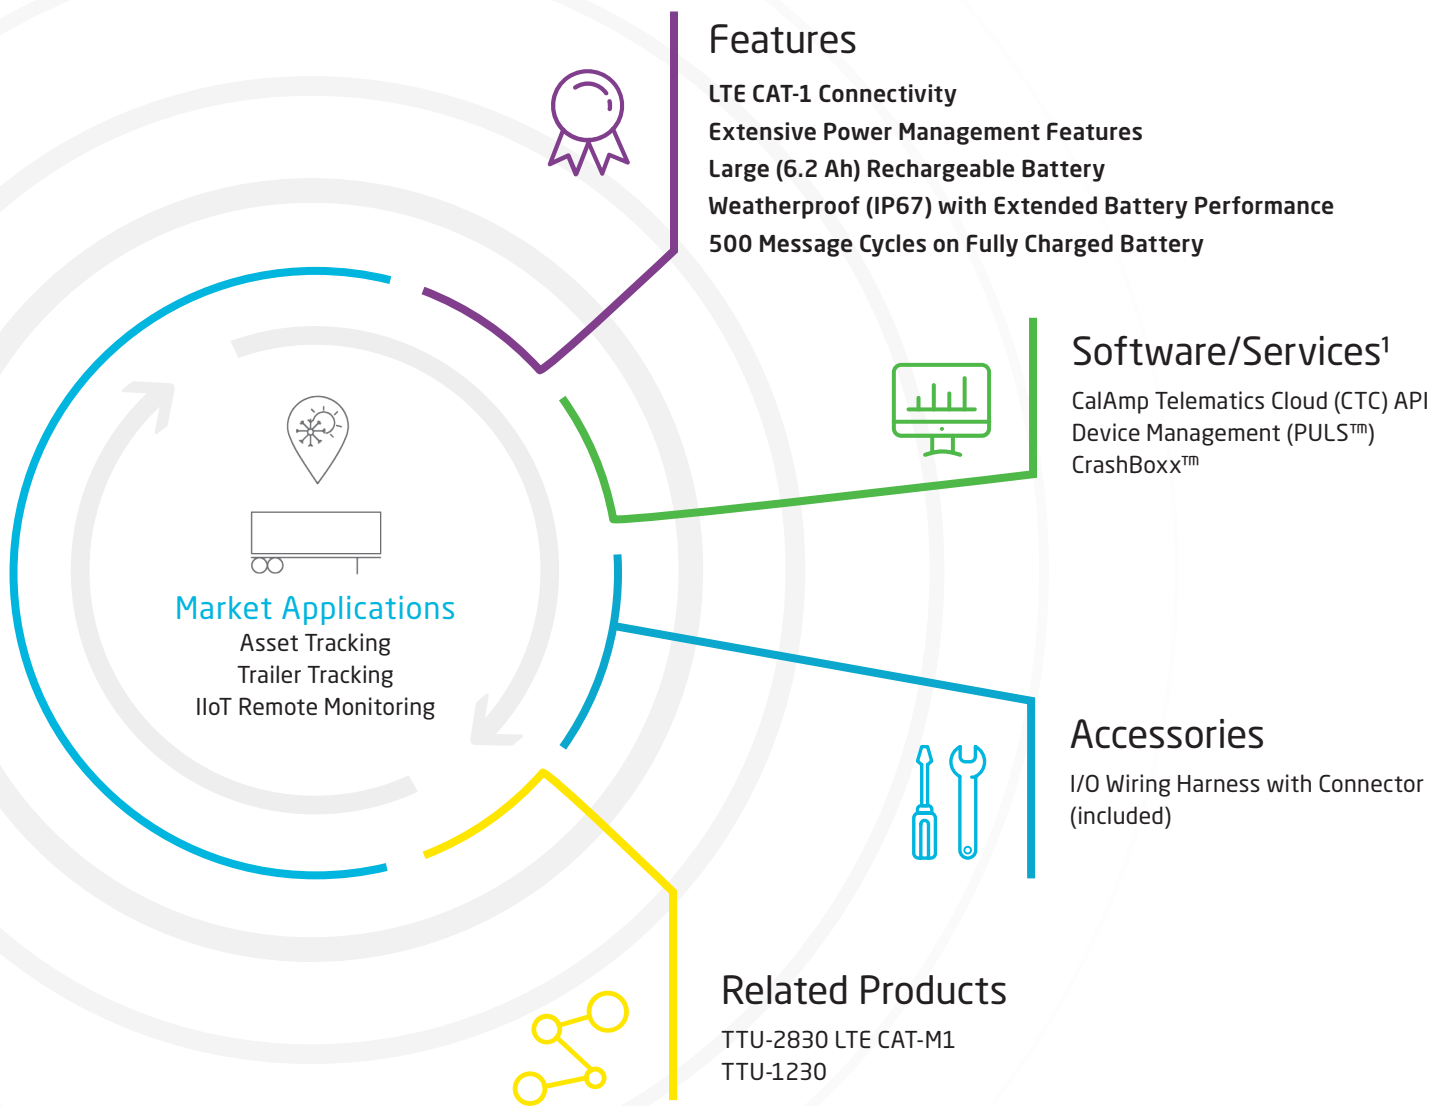

T2840XTQ319DS V10-C

© 2021 CalAmp. All specifications are typical and subject to change without notice.

¹ Subscription service enabled. Contact sales rep for additional details.

Cal/Amp®

CalAmp
15635 Alton Pkwy Ste 250
Irvine, CA 92618
888.3CALAMP
calamp.com

TTU-2840XT™ LTE CAT-1 Technical Specifications

Cellular/Network

North American Variant I	
LTE CAT-1	1900 (B2)/AWS 1700 (B4)/850 (B5)/700 (B12) MHz
HSPA/UMTS	850 (V)/1900 (II) MHz
North American Variant II	
LTE CAT-1	AWS 1700 (B4)/700 (B13) MHz

Data Support

SMS, UDP Packet Data, TCP

Satellite Location (GNSS)

Constellation Support	Hybrid GPS, GLONASS, SBAS Engine (WAAS, EGNOS, MSAS)
Channels	55 Channel
Tracking Sensitivity	-167 dBm
Acquisition Sensitivity	-156 dBm (hot start) -148 dBm (cold start)
Location Accuracy	~2.0m CEP Open Sky (SBAS 24 hours static)
Location Update Rate	Up to 4 Hz
Anti-jamming	
AGPS Location assistance capable	

Comprehensive I/O

Ignition Inputs	1 fixed bias
Digital Inputs	2 (high/low bias selectable 0-30 VDC)
Digital Outputs	3 (open collector relay 150mA)
Analog Inputs	1 external ADC input
Accelerometer	Built in, triple-axis (driver behavior, impact detection, motion sensing, tilt detection)
Serial Interface	1 TTL port
1-Wire® Interface	1 (driver ID/temperature sense)
Status LEDs	2 (GPS and cellular)

Certifications

Industry Certifications FCC, IC, PTCRB, RoHS

Electrical

Operating Voltage	12/24 VDC Vehicle Systems 9-32 VDC (start-up, operating) 7-32 VDC (momentary)
Power Consumption	Typical 400uA @ 12V (deep sleep) Typical 15mA @ 12V (radio-active sleep) Typical 60mA @ 12V (active tracking w/GPS and cell enabled)

Battery Pack

Battery Capacity	Up to 6200 mAh
Battery Technology	Lithium-Ion
Charging Temperature	-10° to +50° C

Environmental

Temperature	-30° to +60° C (connected to primary power) -20° to +60° C (operating on internal battery) -30° to +45° C (storage within 3 months)
Humidity	75% RH @ 50° C non-condensing
Shock and Vibration	U.S. Military Standards 202G, SAEJ1455
ESD	IEC 61000-4-2 (4KV Test)
Ingress Protection Rating	IP67

Physical/Design

Dimensions	5.4 x 3.1 x 2.0" (137 x 80 x 52mm)
Weight	12.06 oz. (342g)

Connectors/SIM Access

Power, I/O	12 wire connector with detachable harness
SIM Access	Internal (2FF SIM)

Cloud/Software Services¹

PULS™	Monitor, manage, upgrade firmware, configure and troubleshoot devices remotely
CTC	Device data stream via RESTful APIs

Edge Intelligence¹

PEG™ Update device functionality or develop new on the edge applications

¹ Subscription service enabled. Contact sales rep for additional details.

CALIFORNIA PROPOSITION 65



WARNING:

This product can expose you to chemicals including Carbon black and Nickel, which are known to the State of California to cause cancer, and including Bisphenol A and 1,3-Butadiene, which are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov